
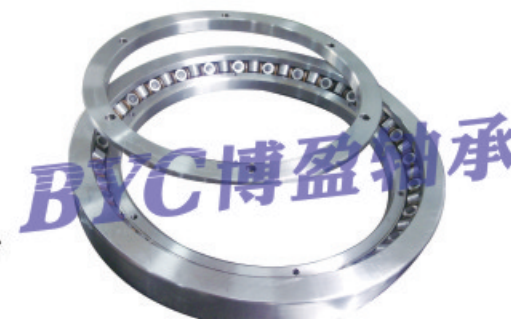


XR、JXR系列/XR、JXR series

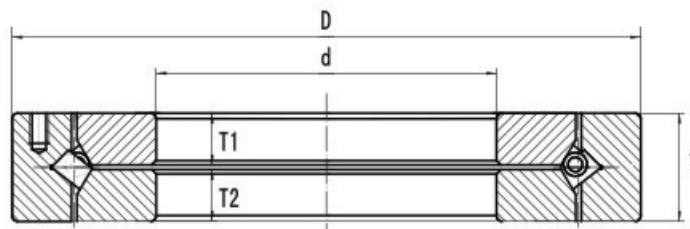

型号 Model Number	主要尺寸 Main dimensions (mm)				基本额定动载荷 Basic dynamic load rating		极限转速 Limiting speed (油Oil) r/m	重量 Weight (Kg)	互换型号 Exchange model			
	内径 Inner ring d(mm)	外径 Outer ring D(mm)	高度 Width T(mm)	倒角 Chamfer r(min)	径向 Radial Cr(KN)	轴向 Axial Ca(KN)			SKF	NACHI	URB	PSL
XR496051	203.2	279.4	31.75	1.5	51.2	61.4	800	6.5	616093A	/	/	/
XR678052	330.2	457.2	63.5	3	100	123	620	35	615661A	300XRN50	/	PSL 912-309A
XR766051	457.2	609.6	63.5	3	141	178	520	51	615894A	0457XRN060	XD.10.0457P5	PSL 912-308A
XR820060	580	760	80	5	215	234	300	100	615662A	580XRN76	XD.10.0580P5	PSL 912-304A
XR855053	685.8	914.4	79.375	3	270	343	260	150	615659A	0685XRN091	XD.10.0686P5	PSL 912-305A
XR882055	901.7	1117.6	82.55	3	300	395	200	185	615895A	0901XRN112	XD.10.0902P5	PSL 912-306A
XR889058	1028.7	1327.15	114.3	3	405	534	160	400	BFKB353282/HA4	1028XRN132	XD.10.1029P5	PSL 912-307A
XR897051	1549.4	1828.8	101.6	3	516	698	80	500	615898A	/	XD.10.1549P5	/
JXR637050	300	400	37	1.5	63	80.1	720	13	/	/	/	/
JXR652050	310	425	45	2.5	82.2	102	640	20	/	/	/	/
JXR699050	370	495	50	3	93.6	119	600	30	/	/	/	/